

# UNI-5013

UNI5013 tag is a flexible label that can be stuck on metallic assets, especially for irregular and uneven surfaces; it has good performance on the metal surface and can be printed and encoded by a Industrial printer.

They offer an extended reading range, making them competent for disparate application areas.



## Applications



## Ordering Information:

Part Number	IC Type	Memory Configuration	Face Material
RFMO-430809- ETSI/FCC	Impinj M781	EPC Memory - 128 bits	Polyester

# For other versions, additional information, and technical support, contact Perfect ID..



## Electrical Specifications

Operational Frequency	FCC: 902-928MHz ETSI: 865- 869 MHz
Interface Protocol	ISO 18000-63 and EPCglobal Gen2v2
Chip Type*	Impinj M781
Memory Configuration	EPC Memory - 128 bits
Data Retention	50 Years
Write Cycle Endurance	100,000 cycles
Read Range**	upto 5 Meter


## Product characteristics

Die Cut Size	50 X 12.5 X 1.1+/-0.5 mm
Yield	100 %
Face Material	Synthetic Polyester
Packaging	5000pcs/roll
Attachment	Adhesive

## Environmental Specifications

Operating Temperature	-35 to +80 °C
Storage Temperature	-35 to +80 °C
IP Rating	IP 68 , test for 5 hr at 1m deep water


## Product Drawing

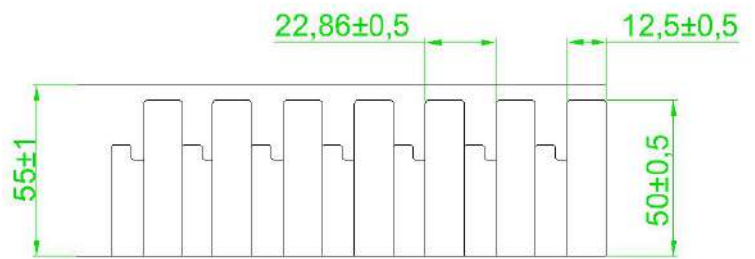

## Personalization

- Customer specific encoding of EPC .
- Customised printing of logo, text, barcode ,etc.

## READ RANGE GRAPH

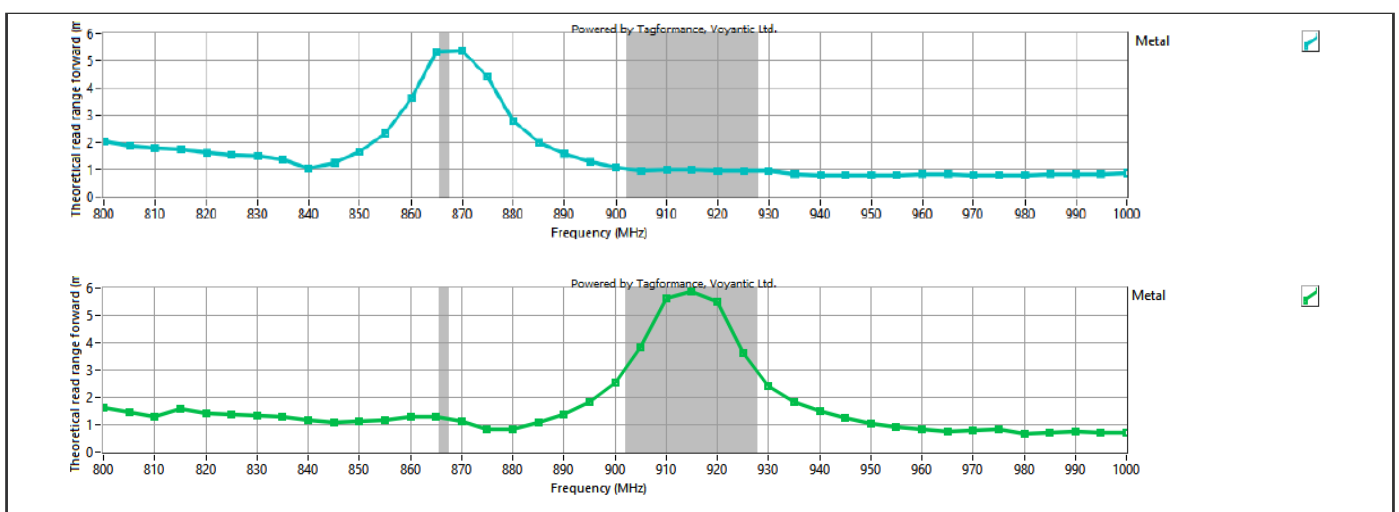

\*\* The indicated read range values are measured in our laboratory testing environment, where antennas with optimum directivity are used with maximum allowed operating power. Different surface materials and environments may exhibit different results.